


Public printing recommendation

Prusa3D Prusament PETG CF Black

MaterialID MAT0042

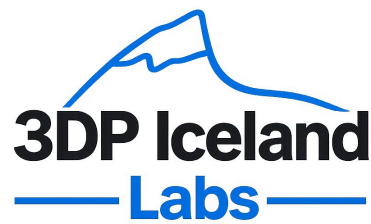

3DPiceland Labs
Generated with 3DPiceland Engineering Platform v60.0.6
WORKFLOW-RELIABILITY - Bug Fixes and Workflow
Reliability
2026-08-25 19:05:46

Guidance boundary: values below are shared base-material guidance resolved only through the canonical BaseMaterialId link. They are not manufacturer-, spool- or printer-specific validated settings. Missing fields remain Not recorded.

Overall 44/100	Engineering axes 6/5	Public rank 166 / 234	MSRP USD/kg 58.00
-------------------	-------------------------	--------------------------	----------------------

Engineering profile

Overall		44/100
Tensile		25/100
Impact		16/100
Stiffness		64/100
Consistency		77/100
Layer adhesion		37/100

Recommended applications

- Repeatable print jobs and production-style batches
- Cosmetic parts, concept models or low-load prototypes
- Avoid high tensile load applications
- Avoid high impact components

Measured strengths

- Layer adhesion: 37/100. Z-axis bonding is better than the material-family context.
- Consistency: 77/100. Repeatability is one of the stronger signals in this material profile.

Limitations

- Tensile: 25/100. Avoid using this as the primary choice for tensile-loaded parts.
- Impact: 16/100. Avoid high impact or shock-loaded components without additional validation.
- Layer adhesion: 37/100. Z-axis performance should be treated with caution.

Engineering trade-offs

- Good repeatability does not compensate for low tensile capability in load-bearing designs.
- The report should be read as a suitability warning rather than a general-purpose recommendation.

Base-material printing guidance

Guidance	Minimum	Recommended	Maximum	Unit
Nozzle temperature	230	250	260	°C
Bed temperature	75	85	85	°C
Print speed	55	130	130	mm/s
Cooling	30	60	75	%
Guidance	Value		Unit	
Cooling guidance	Moderate			
Drying temperature	65		°C	
Drying time	6		hours	
Enclosure	Not required			
Printer / G-code reference	PrusaCoreOneL			
Slicer profile reference	Prusament PETG			

Print workflow checks

- Confirm nozzle temperature, bed temperature, speed, cooling and drying requirements from the manufacturer profile or spool label.
- Print a small validation part before committing to a long, costly or safety-relevant print.
- Orient the part so the governing load does not rely on an unverified or weak engineering axis.
- Reinforced filament: confirm an abrasion-resistant nozzle and manufacturer drying/storage requirements.
- Layer-adhesion evidence is weak; avoid critical Z-axis loading without additional validation.

Decision guidance

- Use this material mainly for low-load, visual or experimental parts.
- Review the listed alternatives if the application needs stronger overall performance.
- Do not choose it as a tensile-strength benchmark material.
- Avoid selecting it for impact-focused testing or shock-loaded designs.

Stronger same-family alternatives

MaterialID	Material	Manufacturer	Overall	Tensile	Impact
MAT0236	Yasin Standard Black PETG CF Black	Yasin	50/100	30/100	20/100
MAT0198	Siraya Tech Fiberheart Black PETG Pro CF Black	Siraya Tech	49/100	33/100	19/100
MAT0060	ColorFabb XT PETG Pink	ColorFabb	48/100	—	—

Confirm exact settings against the manufacturer profile, spool label and actual printer/material combination. Results do not replace application-specific validation.

[Testing methodology](#) · [Download PDF](#)

reports/printing-recommendations/MAT0042/