

Public printing recommendation

Eryone Standard White PP White

MaterialID MAT0194




3DPiceland Labs
Generated with 3DPiceland Engineering Platform v60.0.6
WORKFLOW-RELIABILITY - Bug Fixes and Workflow
Reliability
2026-08-25 19:05:46

Guidance boundary: values below are shared base-material guidance resolved only through the canonical BaseMaterialId link. They are not manufacturer-, spool- or printer-specific validated settings. Missing fields remain Not recorded.

Overall 49/100	Engineering axes 5/5	Public rank 92 / 234	MSRP USD/kg 30.43
-------------------	-------------------------	-------------------------	----------------------

Engineering profile

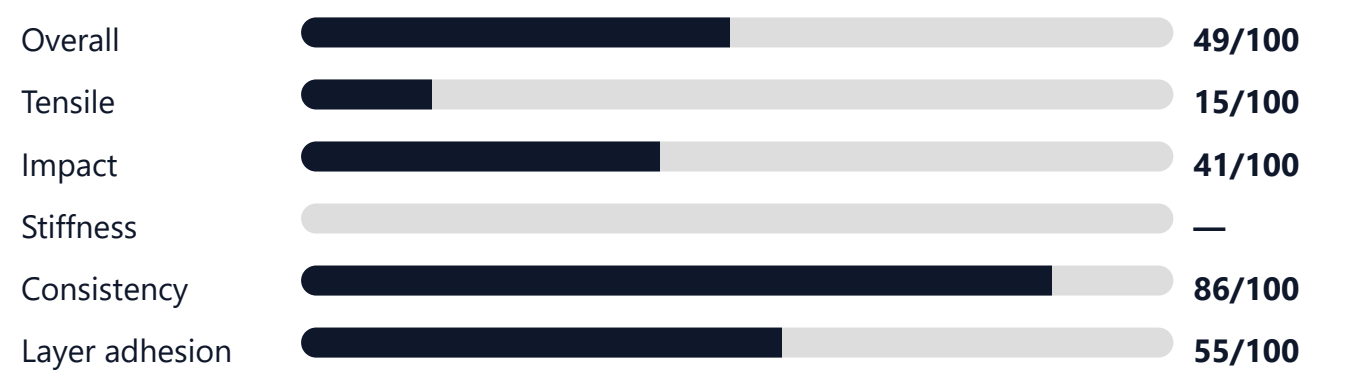

Recommended applications

- Repeatable print jobs and production-style batches
- Cosmetic parts, concept models or low-load prototypes
- Avoid high tensile load applications

Measured strengths

- Layer adhesion: 55/100. Z-axis bonding is better than the material-family context.
- Consistency: 86/100. Repeatability is one of the stronger signals in this material profile.
- Impact: 41/100. Impact behavior is competitive against the material-family context.

Limitations

- Tensile: 15/100. Avoid using this as the primary choice for tensile-loaded parts.

Engineering trade-offs

- Good repeatability does not compensate for low tensile capability in load-bearing designs.
- Layer bonding may be acceptable, but stiffness is still a limiting design factor.
- The report should be read as a suitability warning rather than a general-purpose recommendation.

Base-material printing guidance

Guidance	Minimum	Recommended	Maximum	Unit
Nozzle temperature	270	270	280	°C
Bed temperature	85	95	100	°C
Print speed	10	45	45	mm/s
Cooling	0	0	0	%
Guidance	Value			Unit
Cooling guidance	Off			
Drying temperature	70			°C
Drying time	6			hours
Enclosure	Required			
Printer / G-code reference	PrusaCoreOneL			
Slicer profile reference	Prusament PP			

Print workflow checks

- Confirm nozzle temperature, bed temperature, speed, cooling and drying requirements from the manufacturer profile or spool label.
- Print a small validation part before committing to a long, costly or safety-relevant print.
- Orient the part so the governing load does not rely on an unverified or weak engineering axis.

Decision guidance

- Use this material mainly for low-load, visual or experimental parts.
- Do not choose it as a tensile-strength benchmark material.

Stronger same-family alternatives

MaterialID	Material	Manufacturer	Overall	Tensile	Impact
Confirm exact settings against the manufacturer profile, spool label and actual printer/material combination. Results do not replace application-specific validation.					

[Testing methodology](#) · [Download PDF](#)

reports/printing-recommendations/MAT0194/