

Public printing recommendation

# Eryone Standard Black ASA High Speed Black

MaterialID MAT0211




3DPiceland Labs  
Generated with 3DPiceland Engineering Platform v60.0.6  
WORKFLOW-RELIABILITY - Bug Fixes and Workflow  
Reliability  
2026-08-25 19:05:46

**Guidance boundary:** values below are shared base-material guidance resolved only through the canonical BaseMaterialId link. They are not manufacturer-, spool- or printer-specific validated settings. Missing fields remain Not recorded.

|                   |                         |                          |                      |
|-------------------|-------------------------|--------------------------|----------------------|
| Overall<br>48/100 | Engineering axes<br>6/5 | Public rank<br>103 / 234 | MSRP USD/kg<br>17.50 |
|-------------------|-------------------------|--------------------------|----------------------|

## Engineering profile

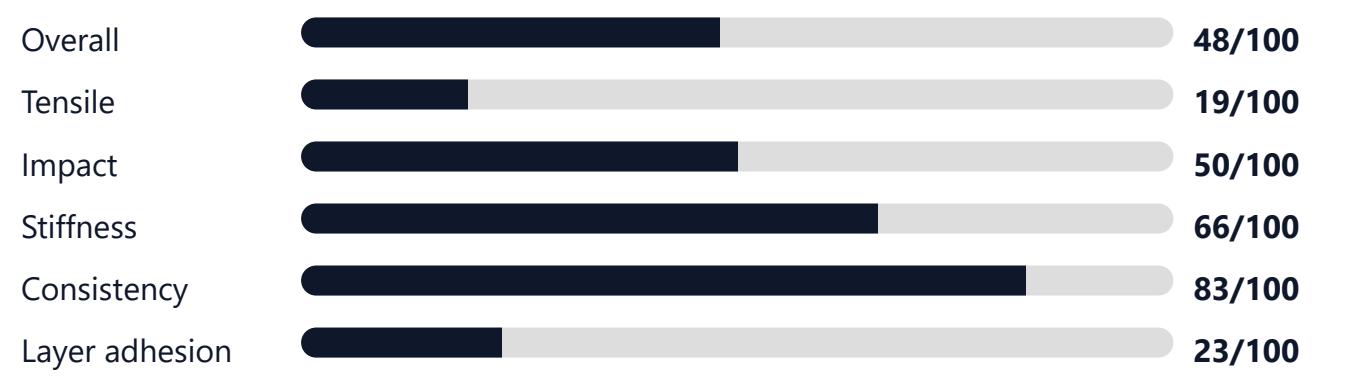

### Recommended applications

- Repeatable print jobs and production-style batches
- Cosmetic parts, concept models or low-load prototypes
- Avoid high tensile load applications

### Measured strengths

- Consistency: 83/100. Repeatability is one of the stronger signals in this material profile.
- Impact: 50/100. Impact behavior is competitive against the material-family context.

### Limitations

### Engineering trade-offs

- Tensile: 19/100. Avoid using this as the primary choice for tensile-loaded parts.
  - Layer adhesion: 23/100. Z-axis performance should be treated with caution.
- Good repeatability does not compensate for low tensile capability in load-bearing designs.
  - The report should be read as a suitability warning rather than a general-purpose recommendation.

Base-material printing guidance

| Guidance           | Minimum | Recommended | Maximum | Unit |
|--------------------|---------|-------------|---------|------|
| Nozzle temperature | 250     | 260         | 270     | °C   |
| Bed temperature    | 110     | 110         | 110     | °C   |
| Print speed        | 55      | 165         | 165     | mm/s |
| Cooling            | 20      | 20          | 25      | %    |

| Guidance                   | Value         | Unit  |
|----------------------------|---------------|-------|
| Cooling guidance           | Low           |       |
| Drying temperature         | 85            | °C    |
| Drying time                | 6             | hours |
| Enclosure                  | Required      |       |
| Printer / G-code reference | PrusaCoreOneL |       |
| Slicer profile reference   | Prusament ASA |       |

Print workflow checks

- Confirm nozzle temperature, bed temperature, speed, cooling and drying requirements from the manufacturer profile or spool label.
- Print a small validation part before committing to a long, costly or safety-relevant print.
- Orient the part so the governing load does not rely on an unverified or weak engineering axis.
- Engineering/high-temperature family: confirm enclosure, ventilation, warping control and material-specific drying requirements.
- Layer-adhesion evidence is weak; avoid critical Z-axis loading without additional validation.

Decision guidance

- Use this material mainly for low-load, visual or experimental parts.
- Review the listed alternatives if the application needs stronger overall performance.
- Do not choose it as a tensile-strength benchmark material.

# Stronger same-family alternatives

| MaterialID | Material                                   | Manufacturer | Overall | Tensile | Impact |
|------------|--------------------------------------------|--------------|---------|---------|--------|
| MAT0014    | Extrudr DuraPro Emerald Green<br>ASA Green | Extrudr      | 51/100  | 21/100  | 49/100 |

Confirm exact settings against the manufacturer profile, spool label and actual printer/material combination. Results do not replace application-specific validation.

[Testing methodology](#) · [Download PDF](#)

reports/printing-recommendations/MAT0211/