

Yasin Standard Wood PLA Wood Wood Brown

Material Engineering Report
MaterialID MAT0145

3DPiceland Engineering Platform

3DPiceland Labs

Generated with 3DPiceland Engineering Platform v60.0.6

WORKFLOW-RELIABILITY - Bug Fixes and Workflow Reliability

Generated 2026-08-25 19:02:26

Public-data contract: This static report contains only allowlisted material identity, public links, canonical MSRP and existing Verified Material Summary / governed score outputs. It excludes raw specimen rows and non-public operational data.

TEST COVERAGE

Complete

ENGINEERING AXES

6/6

PUBLIC MSRP

\$29.68 USD/kg

Material identity


MaterialID	MAT0145
Material	Yasin Standard Wood PLA Wood Wood Brown
Manufacturer	Yasin
Product line	Standard
Base material	PLA
Category	Standard
Variant / finish	Wood
Reinforcement	Wood
Color	Brown

Governed engineering profile


Overall	41/100
Tensile	19/100

Impact	20/100
Stiffness	77/100
Consistency	77/100
Layer adhesion	13/100
Thermal	24/100
Best available axis	stiffness

Engineering score profile

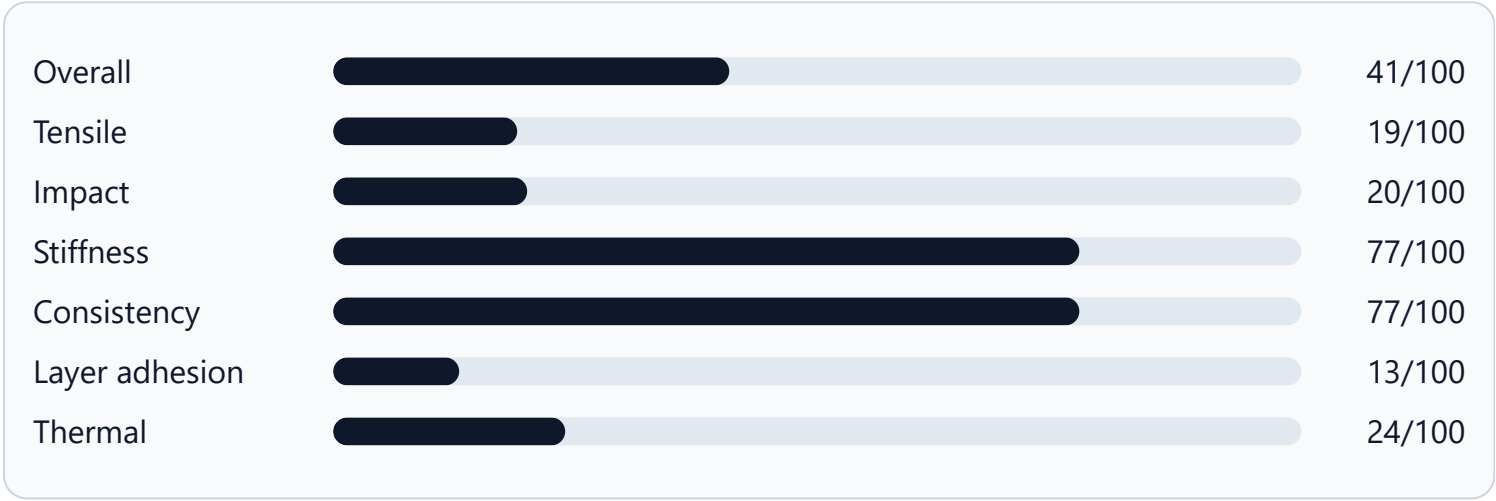

Engineering radar

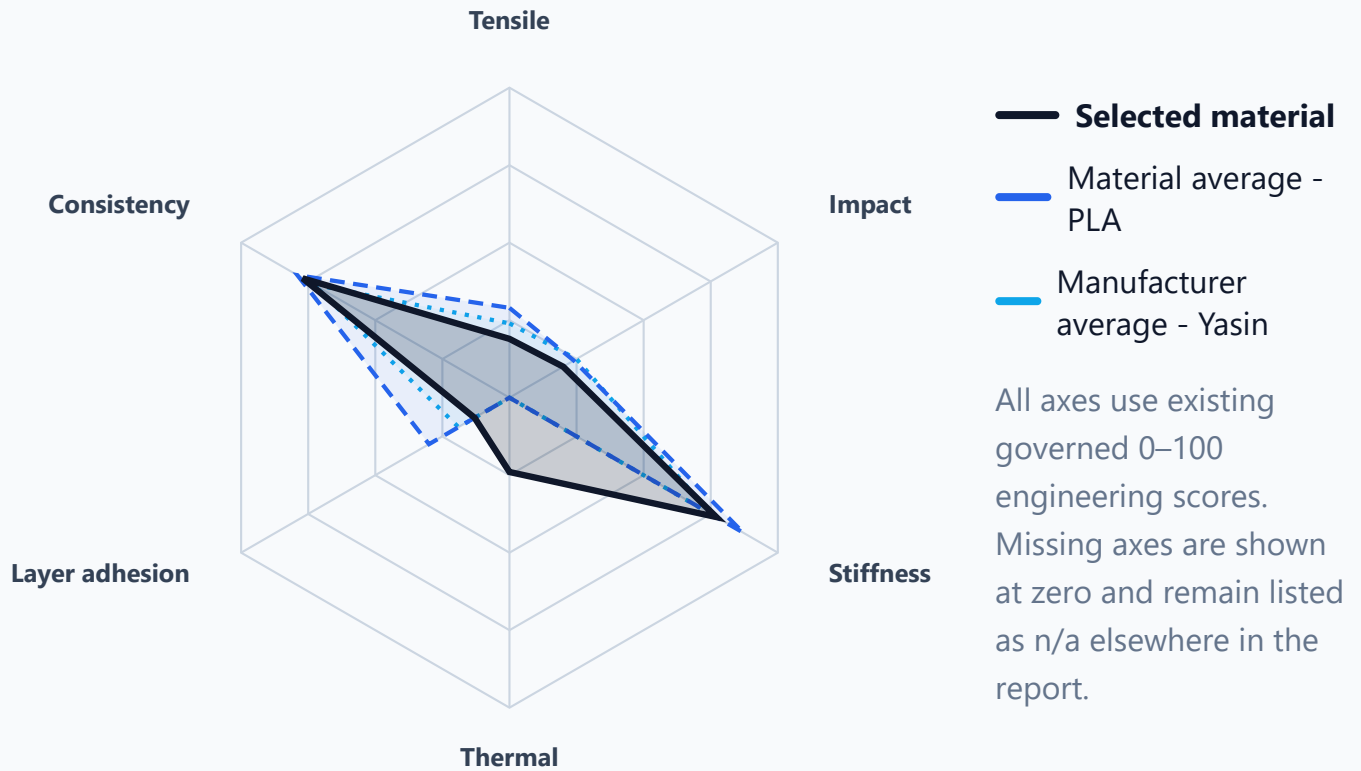

Fixture thermal result

47 °C · score 24/100 · method 3dp-thermal-deflection-fixture-v1
Nearby BlueDOT probe-indicated fixture temperature from a non-standard comparative 3DPIceland method; not ASTM D648, ISO 75, specimen temperature, certified HDT or a manufacturer limit.

Material and manufacturer context

Metric	Selected material	Material average	Manufacturer average
Overall	41/100	50/100	43/100
Tensile	19/100	29/100	24/100
Impact	20/100	24/100	25/100
Stiffness	77/100	87/100	75/100
Consistency	77/100	79/100	73/100
Layer adhesion	13/100	30/100	19/100
Thermal	24/100	—	—

Verified measurement results

Existing Verified Material Summary outputs. The public renderer does not read raw specimen rows or recalculate these values.

Measurement	Average	Std. deviation	CV	Samples	Confidence
Tensile upright	3.512 MPa	1.24 MPa	35.3%	6	6/10
Tensile flat	27.009 MPa	4.879 MPa	18.1%	10	10/10
Impact upright	125.525 kJ/m ²	35.295 kJ/m ²	28.1%	10	10/10
Impact flat	266.077 kJ/m ²	17.209 kJ/m ²	6.5%	10	10/10
Stiffness modulus	2306.403 MPa	—	—	—	—
Stiffness deflection	2.353 mm	—	—	—	—

Measurement provenance

Canonical per-module measured dates from SQLite, shown in unambiguous ISO format. Missing dates are not inferred.

Module	Measured date
Tensile	Not recorded
Impact	Not recorded
Stiffness	Not recorded
Thermal	Not recorded

Engineering interpretation

Summary: Yasin Standard Wood PLA Wood Wood Brown has a specialized or limited engineering profile. It is below its material-family average by 9,1 points and below its manufacturer average by 2 points. Its strongest measured axis is Stiffness, while the weakest axis is Layer Adhesion.

Data-driven review: Yasin Standard Wood PLA Wood Wood Brown is best understood as a repeatable material for cosmetic, concept and low-load prototype work. Compared with the current verified dataset, it ranks better than 18% overall, is below the material-family average by 9,1 points, and is roughly aligned with the manufacturer average. Its strongest engineering signal is Stiffness, while Layer Adhesion is the main limitation to consider before using it for demanding applications.

BEST FEATURE

Stiffness

MAIN LIMITATION

Layer Adhesion

DATASET POSITION

Better than 18%

192 / 234

Strengths

- Consistency: 77/100. Repeatability is one of the stronger signals in this material profile.
- Stiffness: 77/100. Stiffness is a relative advantage in this comparison group.

Limitations

- Tensile: 19/100. Avoid using this as the primary choice for tensile-loaded parts.
- Impact: 20/100. Avoid high impact or shock-loaded components without additional validation.
- Stiffness: 77/100. Expect less shape stability than the stronger materials in the same family.
- Layer adhesion: 13/100. Z-axis performance should be treated with caution.

Engineering trade-offs

- Good repeatability does not compensate for low tensile capability in load-bearing designs.
- Stiffness is useful for shape stability, but impact tolerance is a separate limitation.
- The report should be read as a suitability warning rather than a general-purpose recommendation.

Recommended applications

- Rigid brackets, fixtures and shape-stable prototypes
- Repeatably print jobs and production-style batches
- Cosmetic parts, concept models or low-load prototypes
- Avoid high tensile load applications
- Avoid high impact components

Metric rankings and percentiles

Metric	Score	Rank	Percentile
Overall	41/100	192 / 234	Better than 18%
Tensile	19/100	193 / 226	Better than 15%
Impact	20/100	136 / 226	Better than 40%
Stiffness	77/100	122 / 223	Better than 46%
Consistency	77/100	144 / 231	Better than 38%
Layer adhesion	13/100	180 / 226	Better than 21%
Thermal	24/100	205 / 209	Better than 2%

Decision guidance

- Use this material mainly for low-load, visual or experimental parts.
- Review the listed alternatives if the application needs stronger overall performance.
- Do not choose it as a tensile-strength benchmark material.
- Avoid selecting it for impact-focused testing or shock-loaded designs.

Better alternatives

MaterialID	Material	Manufacturer	Overall	Tensile	Impact
MAT0069	ProtoPasta HTPLA Blood of My Enemies PLA Red	ProtoPasta	100/100	—	—
MAT0079	Polymaker PolyLight PLA Pro Black	Polymaker	65/100	35/100	52/100
MAT0109	Polymaker PolyMax PLA Black	Polymaker	64/100	32/100	62/100

Peer context

Highest-scoring same-base-material peers from the current governed dataset. This context is descriptive and is not recalculated by the public renderer.

MaterialID	Material	Manufacturer	Overall	Tensile	Impact
MAT0069	ProtoPasta HTPLA Blood of My Enemies PLA Red	ProtoPasta	100/100	—	—
MAT0079	Polymaker PolyLight PLA Pro Black	Polymaker	65/100	35/100	52/100
MAT0109	Polymaker PolyMax PLA Black	Polymaker	64/100	32/100	62/100
MAT0080	Polymaker PolySonic PLA Pro Blue	Polymaker	64/100	30/100	58/100
MAT0076	BambuLab Tough+ PLA Tough+ Black	BambuLab	63/100	26/100	59/100
MAT0108	Polymaker PolyLight PLA Black	Polymaker	61/100	33/100	14/100
MAT0074	Winkle Matte PLA Matte Red	Winkle	60/100	34/100	—
MAT0122	Add:North Enhanced PLA Clear	Add:North	59/100	40/100	10/100

Public links

[Manufacturer website](#) [Video review](#) [Download PDF](#)

Methodology and limitations

Results are comparative 3DPIceland measurements from home-built test equipment. Thermal is a nearby BlueDOT probe-indicated fixture temperature, not ASTM D648, ISO 75 or specimen temperature. Missing evidence remains n/a. Scores and test results are not recalculated by this publishing layer and do not replace certified manufacturer datasheets or accredited laboratory testing.

- [Testing methodology](#)
- [Engineering methodology whitepaper](#)